



## CSafeAPS

### A New Pinnacle in Advanced Pallet Shipping

CSafe APS advanced pallet shipper is the latest innovation in reusable temperature-controlled bulk air cargo containers.

CSafe APS combines superior vacuum insulated panel (VIP) insulation with integrated internal phase change material (PCM) refrigerants to provide the highest level of thermal protection.

With access to real-time data for GPS location, cargo and ambient temperature, ambient humidity and pressure, shock, tilt and door open/close events, you can anticipate and address excursion events before they happen.

CSafe APS works harder to make distribution easier. And while your shipments go around the world, we're with you around the clock with first-class, 24/7 customer support for extra peace of mind.



## Key Features



Highly robust and reusable, equipped with best-in-class VIP insulation



Thermal capacity indicator displays real-world duration data in a cloud-based platform



Real-time data tracking for online monitoring throughout the entire shipping journey



Advanced PCM enables hibernation



120+ hours of thermal protection for +2°C to +8°C, +15°C to +25°C and -20°C



Forkliftable from all four sides



US and Europe, single and double pallet footprints



Qualified to ISTA 7D most challenging test profiles



Pre-conditioned for simple loading of product



No dry ice required for frozen shipments



**PAYLOAD (LITERS)**  
**1800-3260**



**TEMPERATURE RANGE**  
**+2°C to +8°C**  
**+15°C to 25°C**  
**-20°C**





**DURATION (HOURS)**  
**120+\***



\*Against worst-case ISTA 7D testing

PRODUCT NAME	PAYLOAD	TEMPERATURE RANGE	DURATION	INTERNAL SPACE L x W x H	EXTERNAL L x W x H	TARE WEIGHT
CSafe APS Single	1800 L 63.57 cu ft	+2°C to +8°C	120+ hrs	1189 x 1244 x 1234 mm 46.8 x 49 x 48.6 in	1451 x 1493 x 1575 mm 57.1 x 58.8 x 62 in	415 kg 914.9 lbs
		+15°C to +25°C				
		-20°C				
CSafe APS Double	3260 L 115.12 cu ft	+2°C to +8°C	120+ hrs	2118 x 1244 x 1234 mm 83.4 x 49 x 48.6 in	2381 x 1493 x 1575 mm 93.7 x 58.8 x 62 in	550 kg 1213 lbs
		+15°C to +25°C				
		-20°C				

**CSafe APS Single**

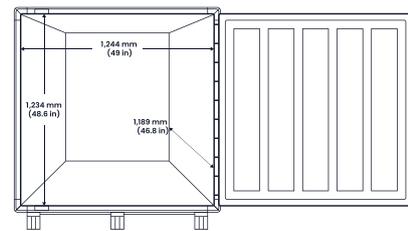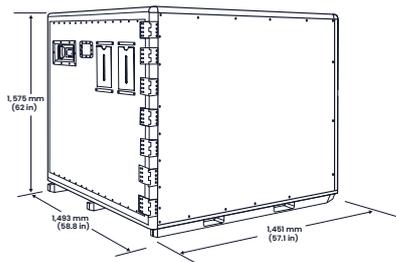

**CSafe APS Double**

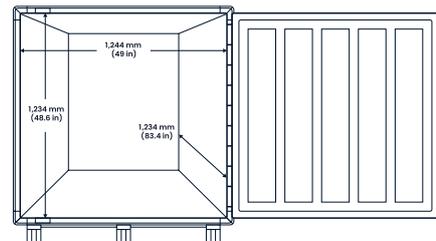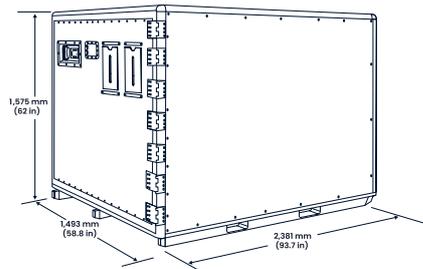

**Contact us at [sales@csafeglobal.com](mailto:sales@csafeglobal.com)**

CSafe has a worldwide network of comprehensive service centers, manufacturing facilities, sales offices and local hub sites to provide solutions where and when you need them. With representatives across the Americas, EMEA and APAC, local and regional support is always available.